


**HT Filters**

PREpleat® HT HC

**Product Overview**

- Rated at 260°C
- Ultra-fine high loft microglass media
- Aluminized steel U-channel frame
- Available in 44 mm and 95 mm depths
- MERV 8

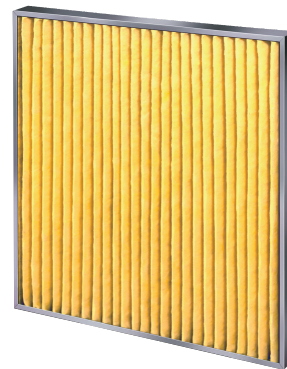

**Specification**

EN779	G4
ASHARE 52.2	MERV 8
Filter Depth (mm)	44 & 95
Media Type	Fibreglass
Frame Material	Aluminised Steel
Special Size Available	Yes
Antimicrobial Available	No
Recommended Final Resistance	300 Pa
Max Operating Temperature	260°C
Air Filtration Certificate	UL 900, ULC-S111

**Product Information**

Part Number	Nominal Size Inches (W x H x D)	Actual Size mm (W x H x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
<b>44 mm</b>				
T147-002-319	12 x 24 x 2	289 x 594 x 44	1,700	177
T147-002-863	24 x 24 x 2	594 x 594 x 44	3,400	
<b>95 mm</b>				
T147-004-319	12 x 24 x 4	289 x 594 x 95	1,700	125
T147-004-863	24 x 24 x 4	594 x 594 x 95	3,400	

HT FILTERS

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

www.aafintl.com

