



Product Overview


- True high-efficiency filter
- Slim-line, mini-pleat design reduces operating costs
- Engineered for a variety of applications
- Easy disposal
- Available with antimicrobial



Specification

EN779	M6 - F9
ASHRAE 52.2	MERV 11 - 15
ISO 16890	ePM10 70%, ePM1 55% - 80%
Filter Depth (mm)	95
Media Type	Fibreglass
Frame Material	Moisture Resistant Beverage Board
Separator Style	Hot Melt
Special Size Available	Yes
Antimicrobial Available	Optional
Header Type	None Header
Recommended Final Resistance	450 Pa
Max Operating Temperature	66°C
Air Filtration Certificate	UL 900

Initial Resistance vs. Airflow

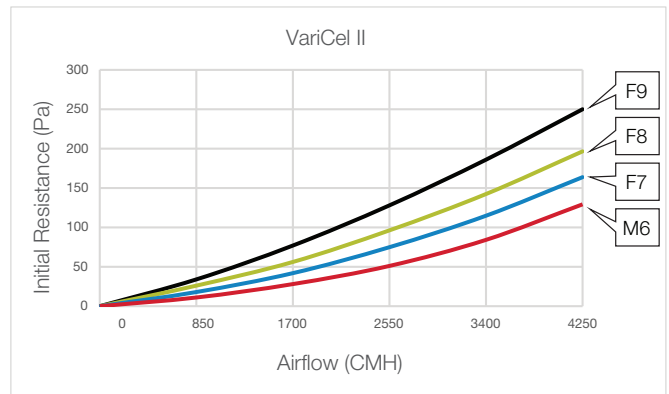

Product Information

Part Number	Nominal Size Inches (W x H x D)	Actual Size mm (W x H x D)	Rated Airflow (CMH)	Rated Initial Resistance (Pa)
M6 / MERV 11 / ePM10 70%				
M332-402-005	20 x 20 x 4	492 x 492 x 95	2,360	84
M332-402-001	12 x 24 x 4	289 x 594 x 95	1,700	
M332-402-006	20 x 24 x 4	492 x 594 x 95	2,840	
M332-402-008	24 x 24 x 4	594 x 594 x 95	3,400	
F7 / MERV 13 / ePM1 55%				
M332-410-005	20 x 20 x 4	492 x 492 x 95	2,360	115
M332-410-001	12 x 24 x 4	289 x 594 x 95	1,700	
M332-410-006	20 x 24 x 4	492 x 594 x 95	2,840	
M332-410-008	24 x 24 x 4	594 x 594 x 95	3,400	
F8 / MERV 14 / ePM1 70%				
M332-428-005	20 x 20 x 4	492 x 492 x 95	2,360	142
M332-428-001	12 x 24 x 4	289 x 594 x 95	1,700	
M332-428-006	20 x 24 x 4	492 x 594 x 95	2,840	
M332-428-008	24 x 24 x 4	594 x 594 x 95	3,400	
F9 / MERV 15 / ePM1 80%				
M332-430-005	20 x 20 x 4	492 x 492 x 95	2,360	186
M332-430-001	12 x 24 x 4	289 x 594 x 95	1,700	
M332-430-006	20 x 24 x 4	492 x 594 x 95	2,840	
M332-430-008	24 x 24 x 4	594 x 594 x 95	3,400	